


Sterling OXY³ Series

Iron Reduction
System



- *Reduces Staining*
- *Eliminates Odors*
- *Brighter Laundry*
- *Protects Plumbing*
- *Corrects Acid Water Conditions*

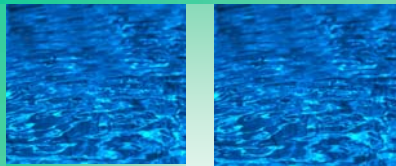

Patent Pending

- **No Chemicals.** A chemical regenerant is not required.
- **No In-Line Venturi to Plug or Adjust.**
- **No Air Compressor.** The noise and expense of compressors are eliminated.
- **No Excess Air.**
- **No Air Release Valve Required.**
- **Less Maintenance.** The only maintenance required is the occasional replenishment of media if the raw water pH is below 7. An easy to use fill port is provided.
- **Rugged Mechanical Piston Valve.** No solenoids or flapper valves to stick.
- **Full Flow By Pass Valve.** Simple to use valve allows you to bypass the unit for lawn sprinkling or during filter maintenance.

Model Number	Backwash Rate Required @ 40 psi	Media Cu. Ft.	Service Flow Rate		Dimensions W x H x D	Pipe Size
			Peak	Continuous		
OXY3-10	5 gpm	1.0	10 gpm	3 gpm	30" x 54" x 14"	1"
OXY3-20	7 gpm	2.0	13 gpm	4 gpm	34" x 58" x 15"	
OXY3-30	10 gpm	3.0	16 gpm	5 gpm	37" x 62" x 15"	

Note: Residential OXY3 Filter systems are not designed for continuous flow applications (Example: ground water heat pumps, lawn irrigation, etc.)

STERLING
WATER SYSTEMS